


# TA43

series

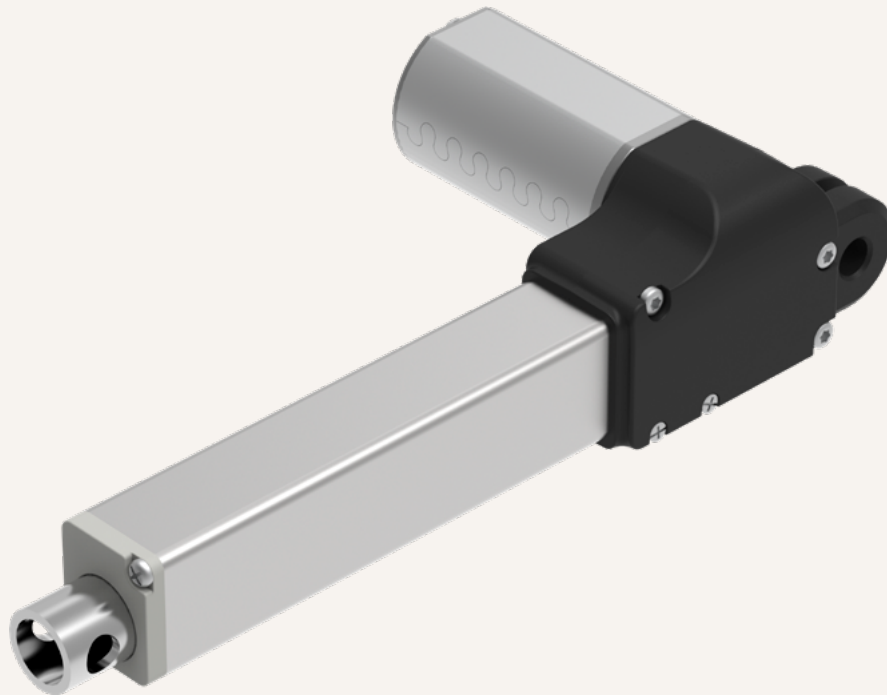

## Product Segments

- **Comfort Motion**


TiMOTION's TA43 linear actuator can fulfill a manufacturer's seating requirement for small installation dimensions. Although small, this linear actuator provides great force. The compact design is merely 100mm, with a maximum stroke length of 300mm, yet can withstand a maximum pressure of 4000N. Under no load conditions, the TA43 provides smooth and powerful seating adjustments at 12.1mm/second.

### General Features

Voltage of motor	24V DC or 24V DC (PTC)
Maximum load	4,000N in push/pull
Maximum speed at full load	5.4mm/s (with 2,000N in a push or pull condition)
Stroke	≥ 20~300mm
Minimum installation dimension	≥ 100mm
Color	Black or grey
Operational temperature range	+5°C~+45°C
Options	Hall sensors

**Drawing**

Standard Dimensions  
(mm)

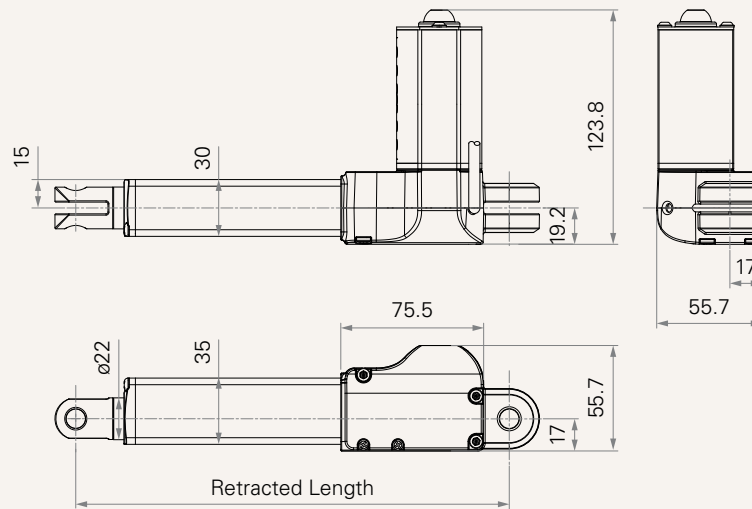

**Load and Speed**

CODE	Load (N)		Self Locking Force (N)	Typical Current (A)		Typical Speed (mm/s)	
	Push	Pull		No Load 32V DC	With Load 24V DC	No Load 32V DC	With Load 24V DC
<b>Motor Speed (4100RPM, Duty Cycle 10%)</b>							
<b>B</b>	4000	4000	4000	1.0	3.1	6.0	2.5
<b>C</b>	3000	3000	3000	1.0	2.7	7.9	3.6
<b>D</b>	2000	2000	2000	1.0	2.7	12.1	5.4
<b>Motor Speed (4500RPM, Duty Cycle 10%)</b>							
<b>E</b>	3000	3000	3000	1.0	3.1	8.5	5.0

**Note**


- 1 Please refer to the approved drawing for the final authentic value.
- 2 The current & speed in table are tested with 24V DC motor.
- 3 This self-locking force level is reached only when a short circuit is applied on the terminals of the motor. All the TiMOTION control boxes have this feature built-in.
- 4 The current & speed in table are tested when the actuator is extending under push load.
- 5 The data in the performance charts shows theoretical value using specific TiMOTION control boxes. Please contact TiMOTION for more details.
- 6 Standard stroke: Min.  $\geq 20$ mm, Max. please refer to below table.

CODE	Load (N)	Max Stroke (mm)
<b>B, C, D, E</b>	$\leq 4000$	300


**Performance Data (24V DC Motor)**

Motor Speed (4100RPM)

Speed vs. Load

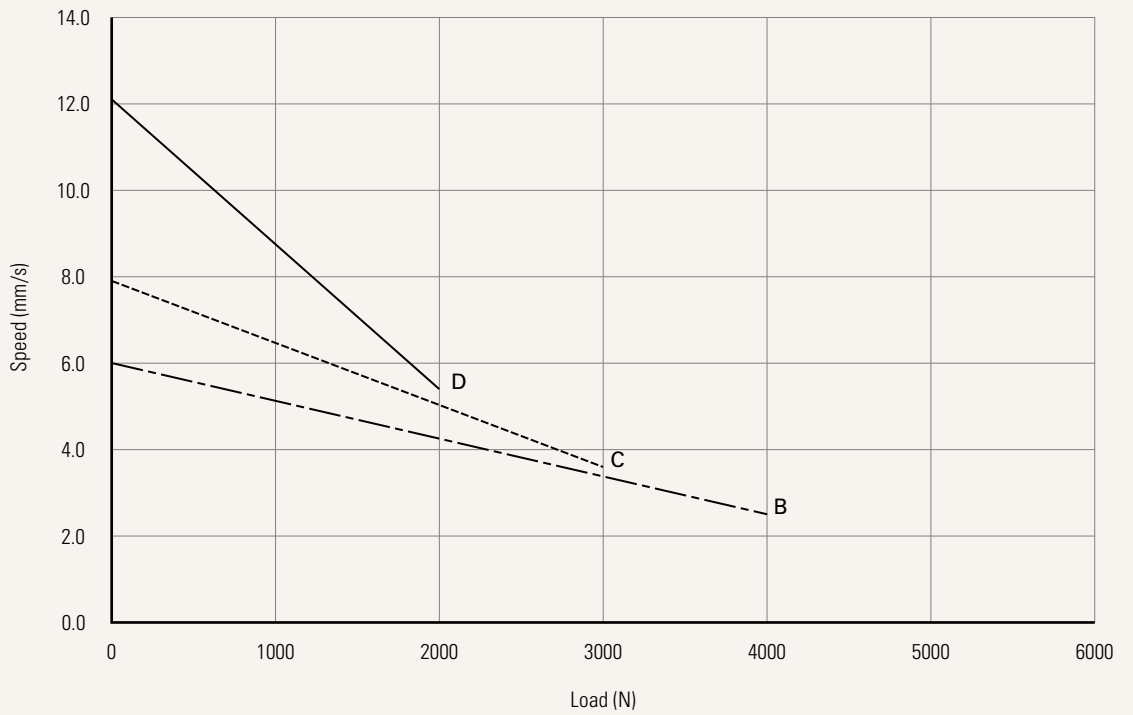


Current vs. Load

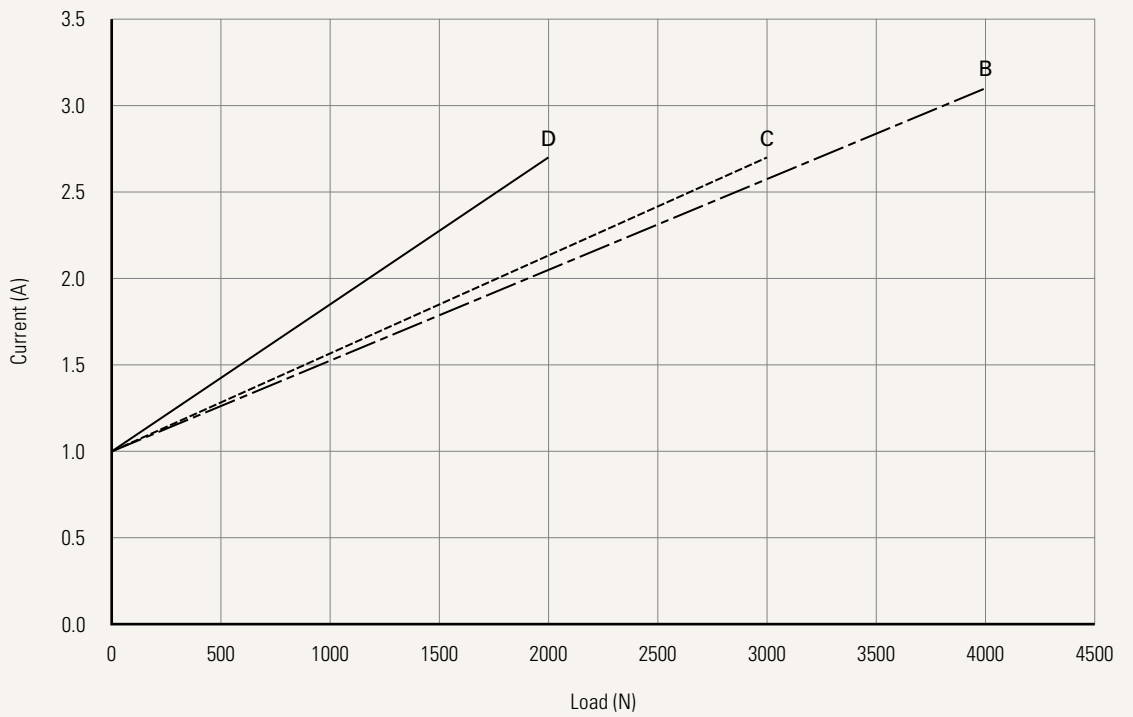


Performance Data (24V DC Motor)

Motor Speed (4500RPM)

Speed vs. Load

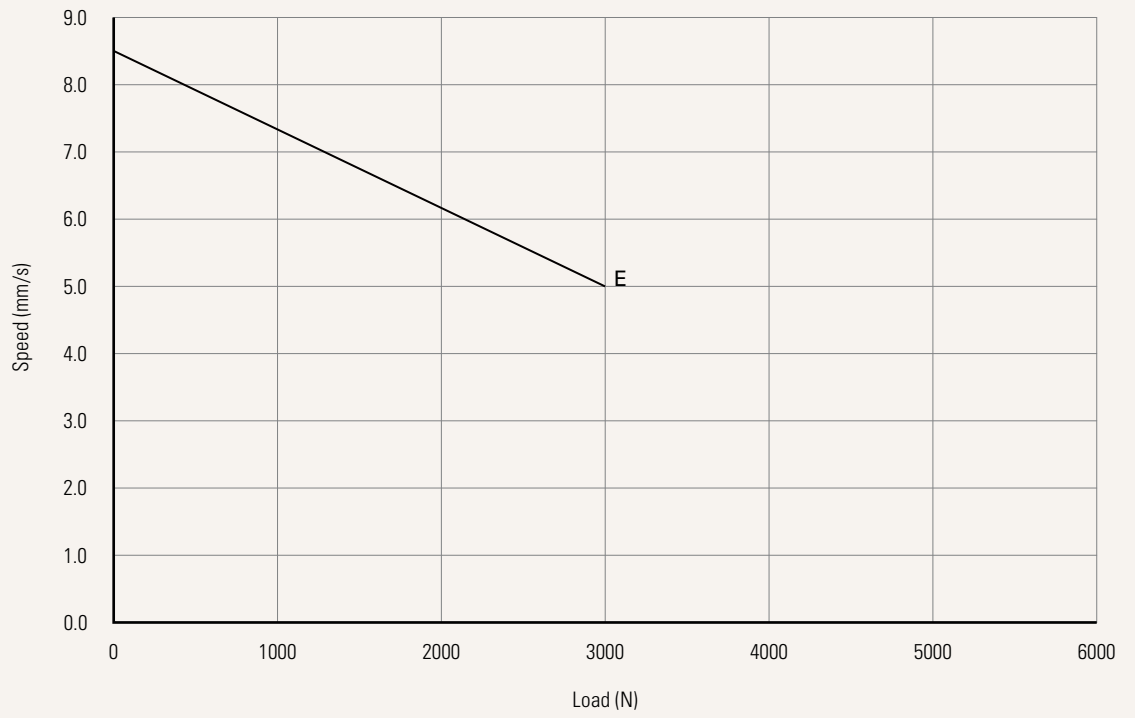

Current vs. Load

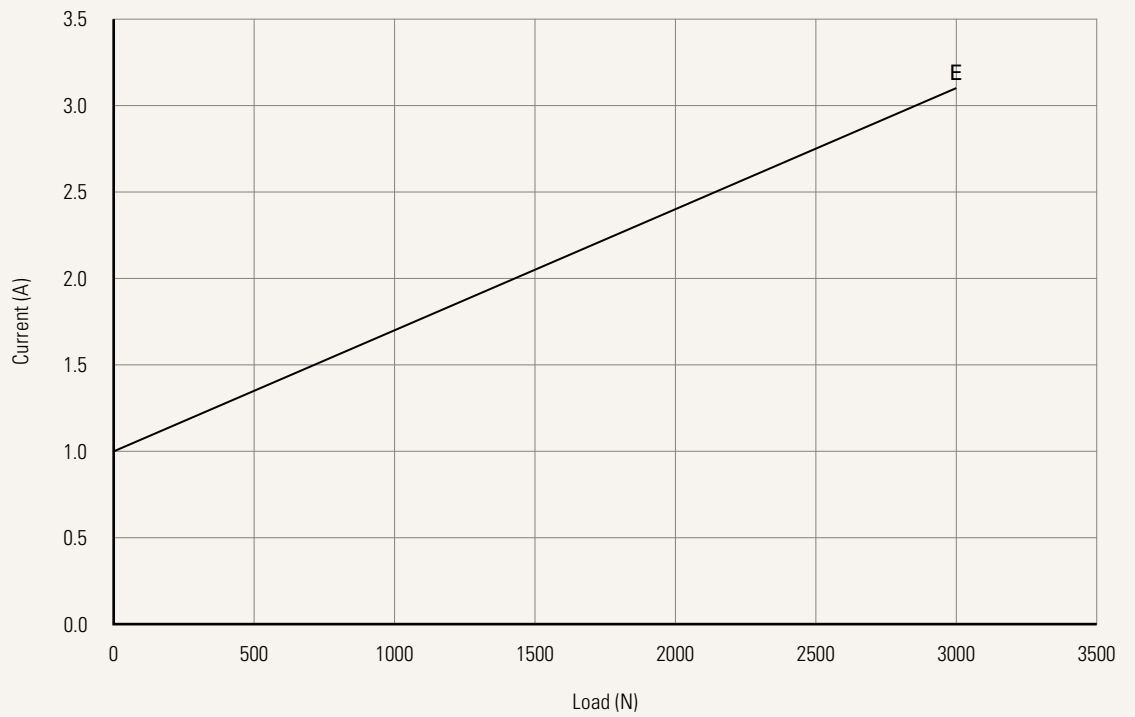

<b>Voltage</b>	2 = 24V DC	5 = 24V DC, PTC		
<b>Load and Speed</b>	<a href="#">See page 2</a>			
<b>Stroke (mm)</b>	<a href="#">See page 2</a>			
<b>Retracted Length (mm)</b>	<a href="#">See page 6</a>			
<b>Rear Attachment (mm)</b>	1 = Plastic, U clevis, slot 6.2, depth 13.5, hole 8.2	2 = Plastic, U clevis, slot 6.2, depth 13.5, hole 10.2		
	<a href="#">See page 7</a>			
<b>Front Attachment (mm)</b>	2 = Punched hole on inner tube + plastic cap, without slot, hole 10.2	7 = Aluminum casting, U clevis, slot 6.2, depth 17.0, hole 8.2		
	5 = Plastic, without slot, hole 8.2, with plastic T-bushing	8 = Aluminum casting, U clevis, slot 6.2, depth 17.0, hole 10.2		
	6 = Plastic, without slot, hole 10.2, with plastic T-bushing			
<b>Direction of Rear Attachment (Counterclockwise)</b>	2 = 0°			
	<a href="#">See page 7</a>			
<b>Color</b>	1 = Black	2 = Grey (Pantone 428C)		
<b>IP Rating</b>	1 = Without			
<b>Special Functions for Spindle Sub-Assembly</b>	0 = Without			
<b>Functions for Limit Switches</b>	1 = Two switches at full retracted / extended positions to cut current	3 = Two switches at full retracted / extended positions to cut current + third one in between to send signal		
	<a href="#">See page 8</a>			
<b>Output Signals</b>	0 = Without	5 = Hall sensor * 2		
<b>Connector</b>	1 = DIN 6P, 90° plug	C = Y cable (For direct cut system, water proof, anti pull)	E = Molex 8P, plug	
	2 = Tinned leads		F = DIN 6P, 180° plug	
	4 = Big 01P, plug			
<b>Cable Length (mm)</b>	0 = Straight, 100	3 = Straight, 1000	6 = Straight, 2000	B-H = For direct cut system. <a href="#">See page 8</a>
	1 = Straight, 500	4 = Straight, 1250	7 = Curly, 200	
	2 = Straight, 750	5 = Straight, 1500	8 = Curly, 400	

## Retracted Length (mm)


1. Calculate  $A+B = Y$
2. Retracted length needs to  $\geq \text{Stroke}+Y$

A.	
Front Attach.	Rear Attach.
	1, 2
2	+100
5, 6	+108
7, 8	+138


B.	
Stroke (mm)	
20~200	-
201~250	+5
251~300	+10

## Rear Attachment (mm)

1 = Plastic, U clevis, slot 6.2, depth 13.5, hole 8.2




2 = Plastic, U clevis, slot 6.2, depth 13.5, hole 10.2




## Front Attachment (mm)


2 = Punched hole on inner tube + plastic cap, without slot, hole 10.2




5 = Plastic, without slot, hole 8.2, with plastic T-bushing




6 = Plastic, without slot, hole 10.2, with plastic T-bushing



7 = Aluminum casting, U clevis, slot 6.2, depth 17.0, hole 8.2




8 = Aluminum casting, U clevis, slot 6.2, depth 17.0, hole 10.2



## Direction of Rear Attachment (Counterclockwise)

2 = 0°

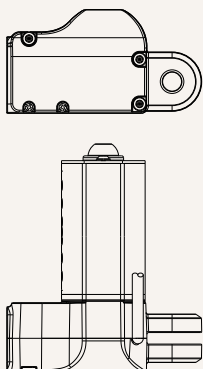


## Functions for Limit Switches

### Wire Definitions


CODE	Pin					
	● 1 (Green)	● 2 (Red)	○ 3 (White)	● 4 (Black)	● 5 (Yellow)	● 6 (Blue)
<b>1</b>	extend (VDC+)	N/A	N/A	N/A	retract (VDC+)	N/A
<b>3</b>	extend (VDC+)	common	upper limit switch	N/A	retract (VDC+)	lower limit switch

### Connector


1 = DIN 6P, 90° plug




2 = Tinned leads



4 = Big 01P, plug




C = Y cable (For direct cut system, water proof, anti pull)

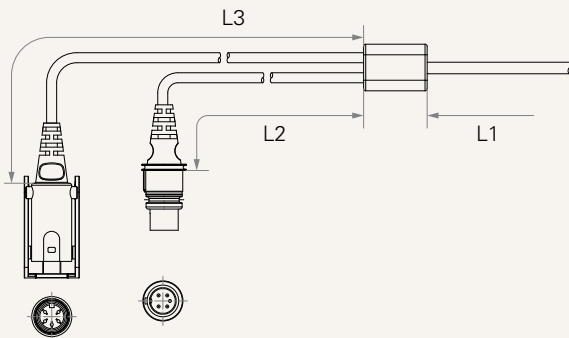


### Cable length for direct cut system (mm)

CODE	L1	L2	L3
<b>B</b>	100	100	100
<b>C</b>	100	1000	400
<b>D</b>	100	2700	500
<b>E</b>	1000	100	100
<b>F</b>	100	600	1000
<b>G</b>	1500	1000	1000
<b>H</b>	100	100	1200

E = Molex 8P, plug



F = DIN 6P, 180° plug



### Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.