



Drawing


Dimensions with EU Plug
(mm)

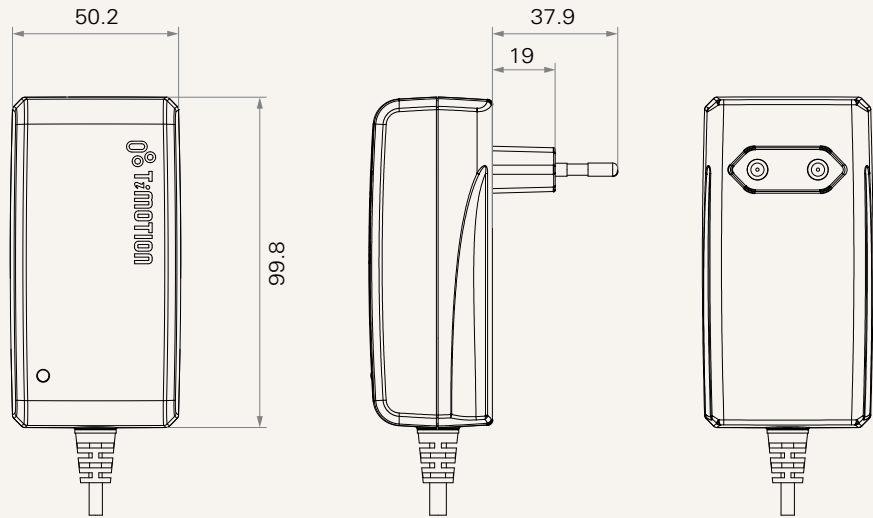

Dimensions with USA Plug
(mm)

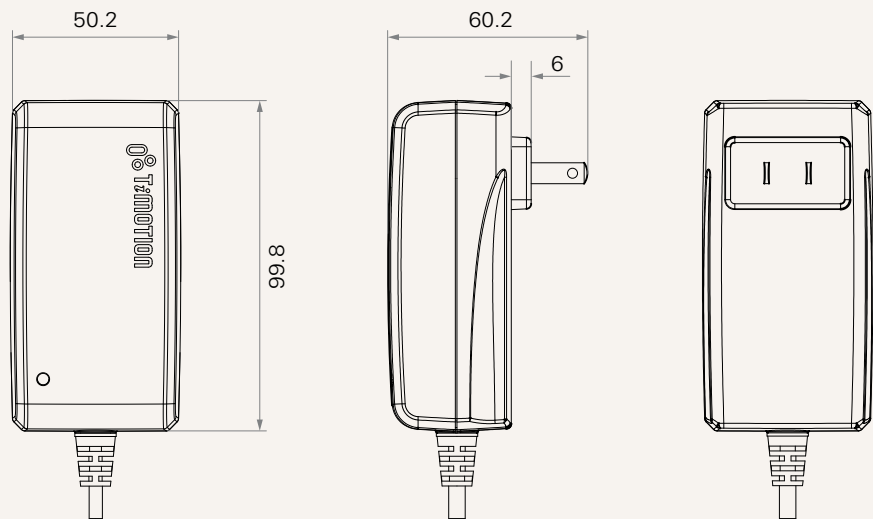


Dimensions with AUS Plug
(mm)

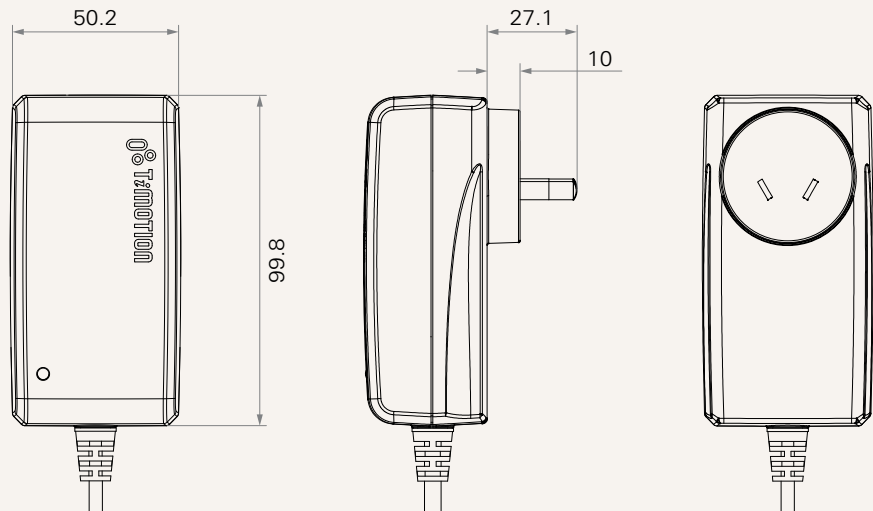


Drawing

Dimensions with UK Plug
(mm)

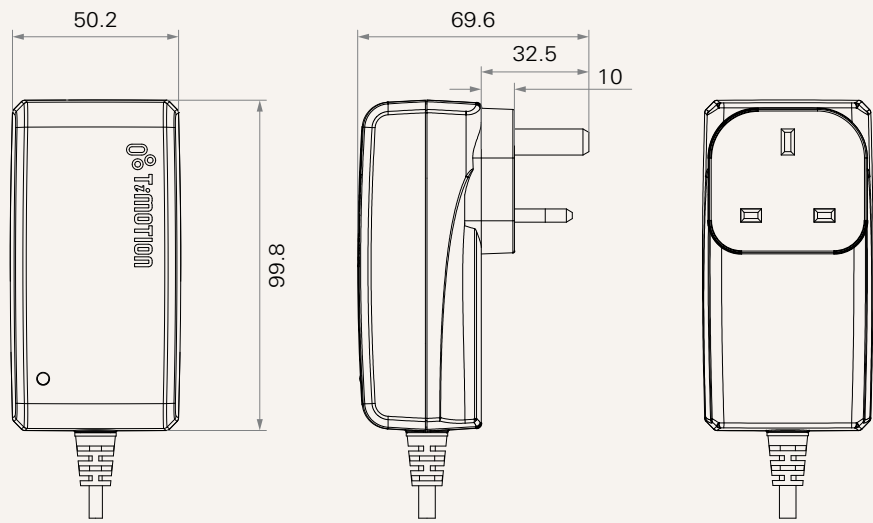

Dimensions with JPN Plug
(mm)

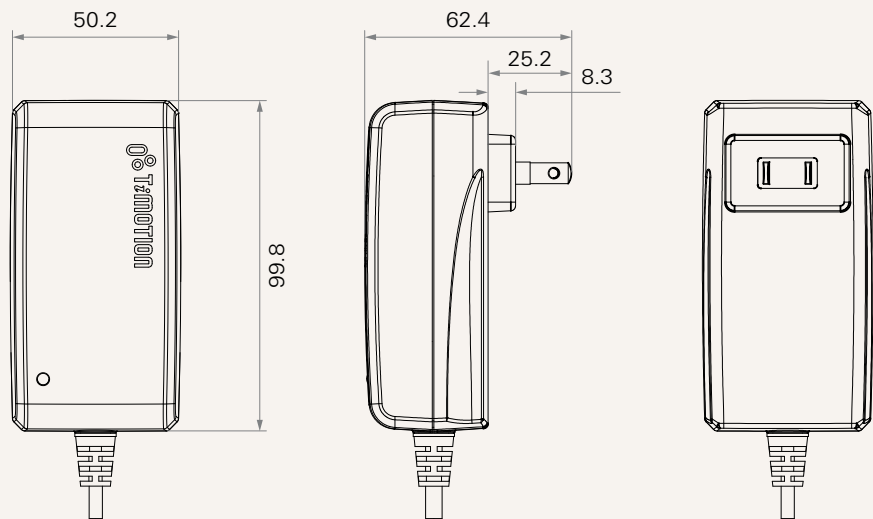


TBC2


Version: 20181026-D

Input Voltage	4 = 100~240V AC		
AC Plug See page 2	1 = EU 2 = US	3 = AU 4 = UK	5 = JP
Color	1 = Black	2 = Grey (Pantone 428C)	
Charging Cradle See page 5	0 = Without	1 = With	2 = With. With LED power indicator
Cable Length & Plug (mm) See page 5	1 = Straight, 2000; DC plug, 180° 2 = Straight, 4000; DC plug, 180°	3 = Straight, 2000; DC plug, 90° 4 = Straight, 4000; DC plug, 90°	
IP Rating	1 = Without		

Charging Cradle

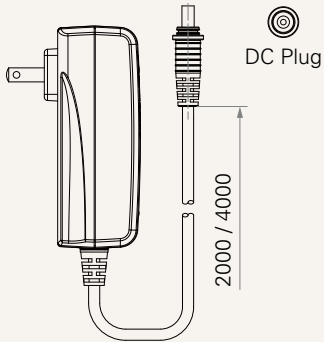

Cable Length & Plug (mm)

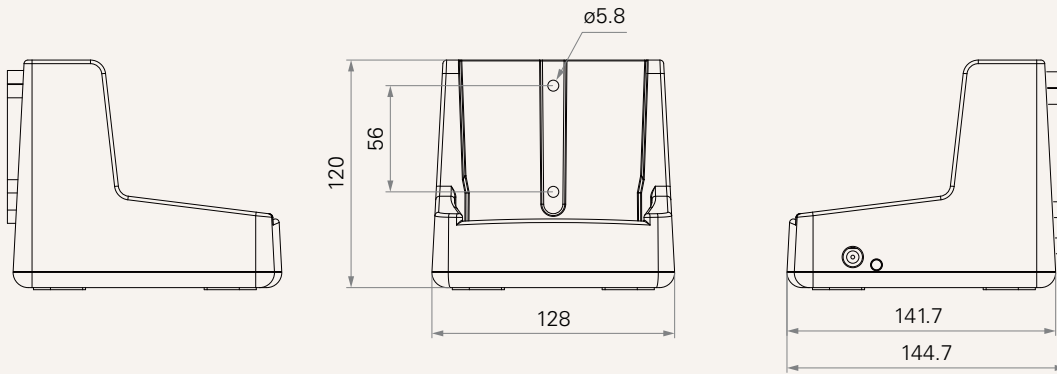

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.