

TP4

series



Product Segments




- **Care Motion**

General Features

Transformer type	EI, Toroidal or SMPS
Input voltage	110/120/230V AC, or 100~240V AC (SMPS)
Maximum output	30V DC, 5A
Plug support	EU, USA, AUS, UK, JPN
Color	Black or grey
IP rating	Up to IP66
Certificate	IEC60601-1, ES60601-1

Drawing

Standard Dimensions
(mm)

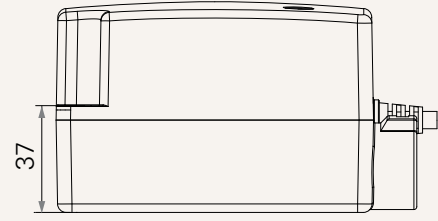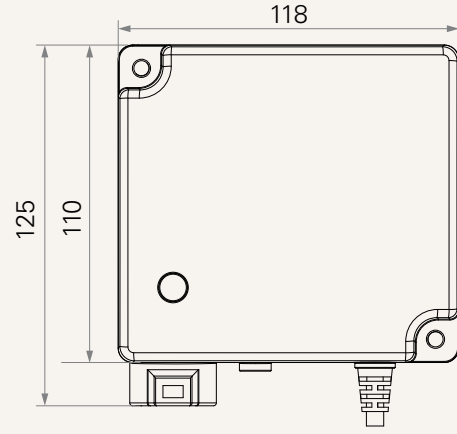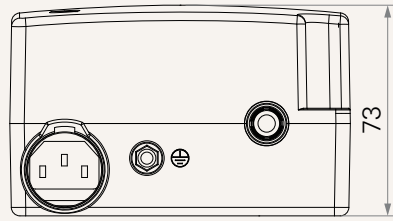

TP4 Ordering Key

TP4

Version: 20190308-F

Voltage	1 = 110V	2 = 120V	3 = 230V	4 = 100~240VAC (SMPS)
Plug	1 = EU 2 = USA	3 = AUS 4 = UK	5 = JPN	
Color	1 = Black	2 = Grey (Pantone428C)		
Cable Length & Plug (mm)	0 = AC cable: straight, 4000mm; DC cable: straight, 150mm (mount on TC8), DIN 5P Male	1 = AC cable: straight, 2000mm; DC cable: straight, 1000mm, DIN 5P Male	2 = AC cable: straight, 4000mm; DC cable: straight, 1000mm, DIN 5P Male	3 = AC cable: straight, 4000mm; DC cable: straight, 150mm, DIN 5P Female
	4 = AC cable: straight, 2000mm; DC cable: straight, 1000mm, DIN 5P Female	5 = AC cable: straight, 4000mm; DC cable: straight, 1000mm, DIN 5P Female	6 = AC cable: straight, 4000mm; DC cable: straight, 150mm, 01P Female	7 = AC cable: straight, 2000mm; DC cable: straight, 1000mm, 01P Female
			8 = AC cable: straight, 4000mm; DC cable: straight, 1000mm, 01P Female	
Grounding Function	0 = Without	1 = With		

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.