


NO MORE CONTROL SYSTEM RESET REQUIRED

TA31QR provides a spindle set Hall sensors or POT which will continue to send position feedback after the quick release action is performed, allowing the user to maintain an accurate position within the control system.

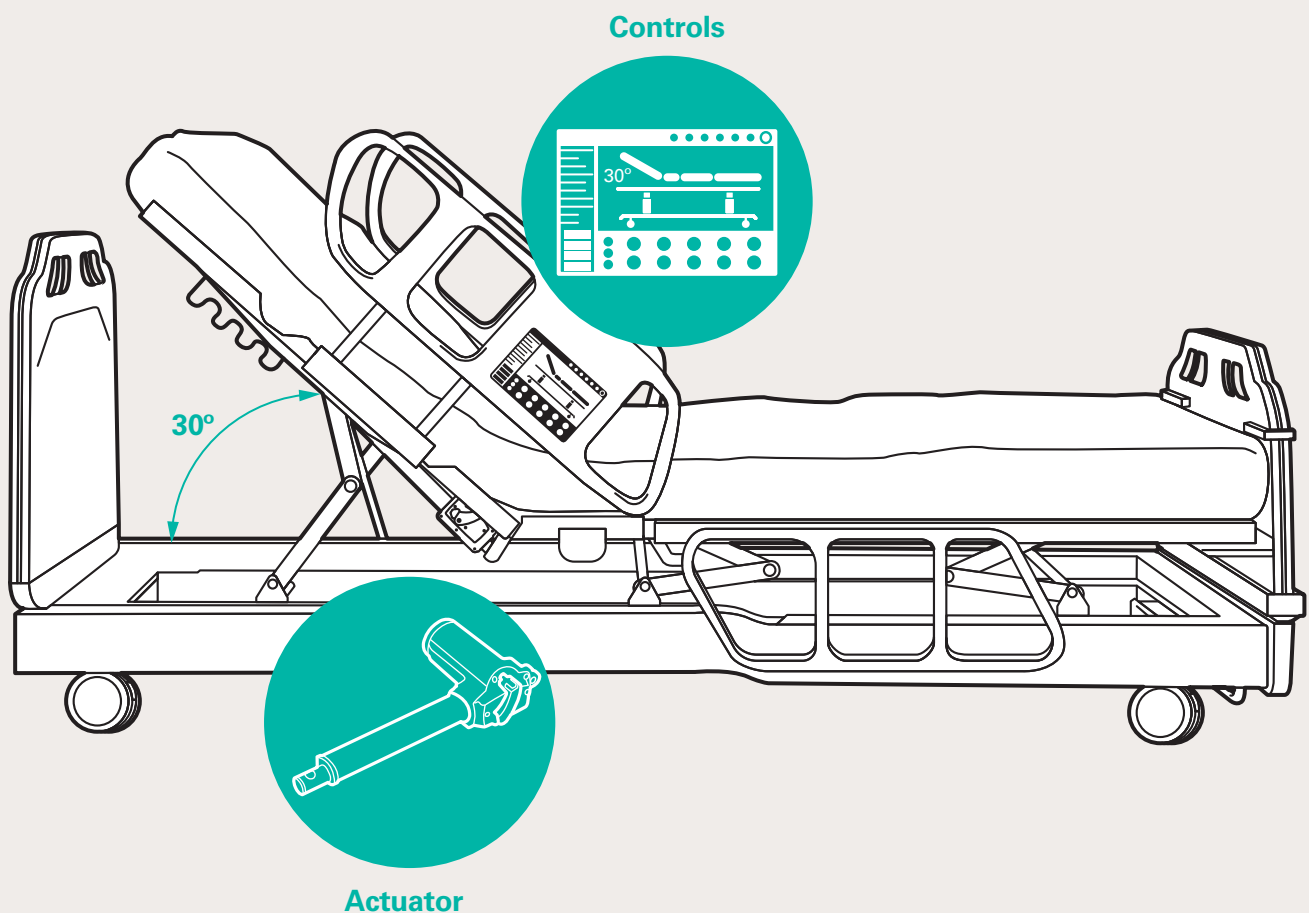

TA31QR SERIES

- Max. load: 5,000N in push
- Stroke: 25~450mm
- IP Rating: Up to IP66W
- Max. speed at full load: 6.3mm/s (with 3500N in a push condition)
- Min. installation dimension: Stroke+178mm

Europe

Tel +33 (0)1 74 82 50 51
sales.eu@timotion.com

Sales Office in Germany

Tel +49 2241 1487902
sales.eu@timotion.com

