


# TL10

series

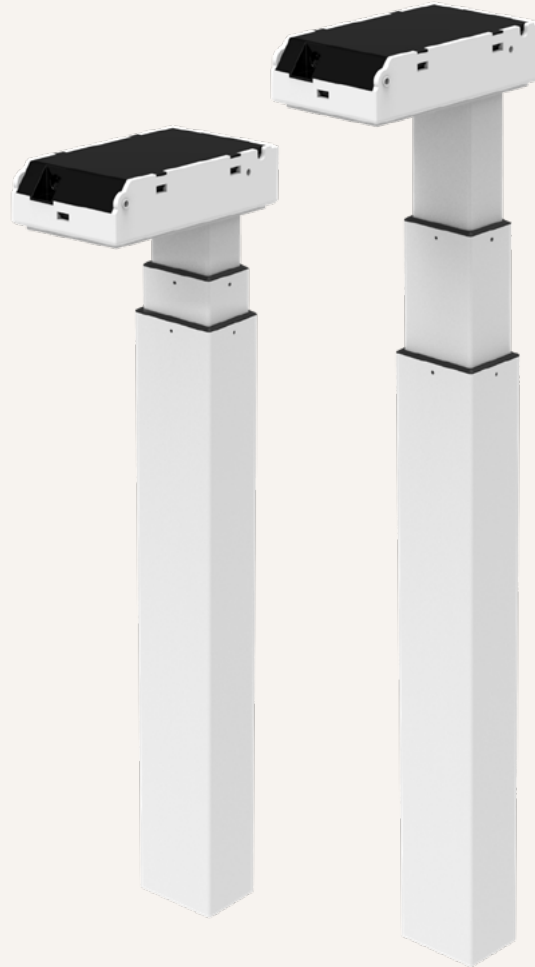

## Product Segments

### • Ergo Motion


TiMOTION's TL10 series lifting columns are specifically designed for use in ergonomic desks and work tables. Using multiple TL series lifting columns with compatible TC series Control Boxes and TH/TDH series controls, work surfaces can be controlled quietly and smoothly with synchronous movement. All Ergo Motion TC series control boxes have a less than 0.1W standby power option that reduces power consumption. Our wide range of columns offer customers the solutions they require to satisfy their working environment project requirements. The TL10 has a three part telescopic outer tube that is designed for a narrow-top, wide-bottom rectangular appearance.

#### General Features

Maximum load	800N in push
Maximum speed at full load	33mm/s (with 800N in a push condition)
Minimum installation dimension	590 / 560 (M) mm
Stroke	650 / 660 (M) mm
Dimension of outer tube (L*W)	80*60mm
Three part outer tube with rectangular appearance	
With narrow top and wide bottom configuration	

## Drawing

Standard Dimensions  
(mm)

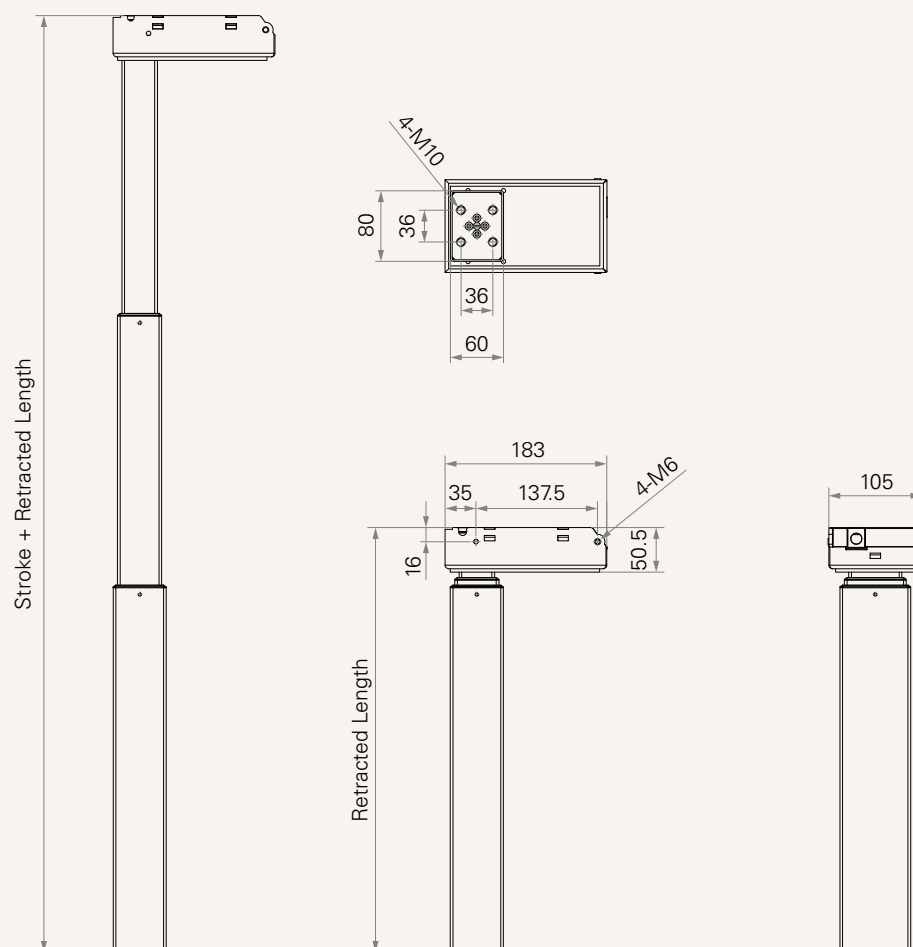

## Load and Speed

CODE	Load (N)	Self Locking Force (N)	Typical Current (A)		Typical Speed (mm/s)	
	Push		No Load 32V DC	With Load 24V DC	No Load 32V DC	With Load 24V DC

### Motor Speed (5200RPM)

<b>C</b>	800	800	2.8	6.0	58.0	33.0
----------	-----	-----	-----	-----	------	------


## Note

- 1 This self-locking force level is reached only when a short circuit is applied on the terminals of the motor. All the TiMOTION control boxes have this feature built-in.
- 2 The numbers above are based on the tested average, please refer to the approval drawing for the final value.


**Performance Data (24V DC Motor)**

Motor Speed (5200RPM)

Speed vs. Load

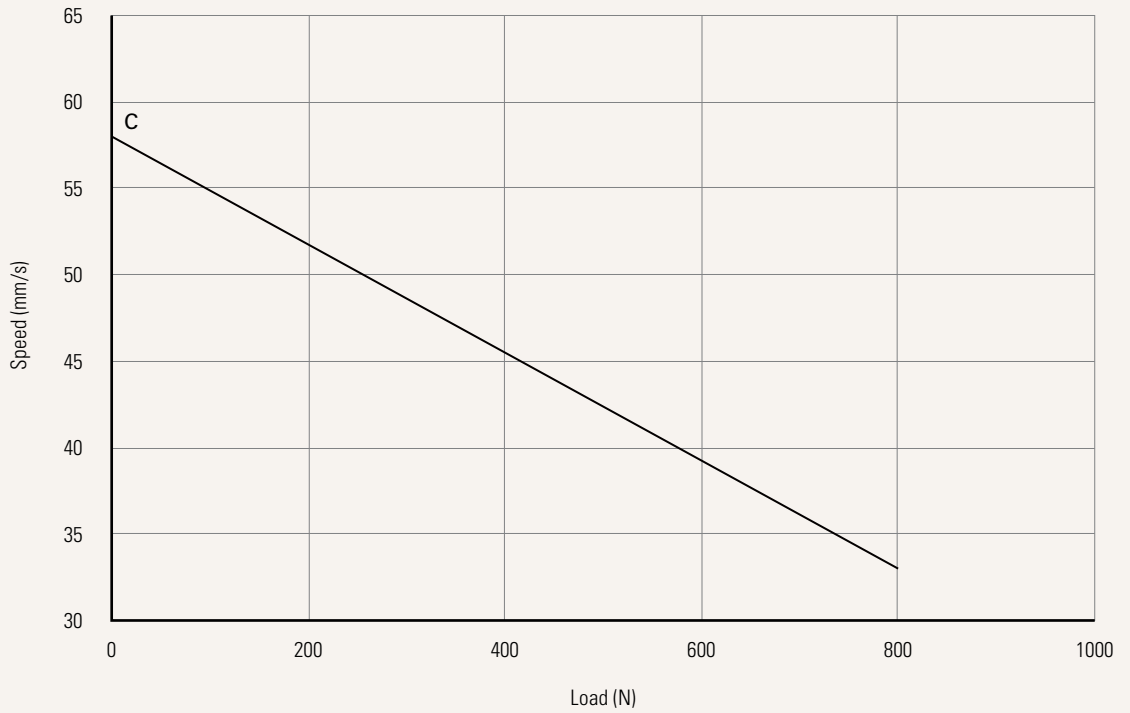

Current vs. Load

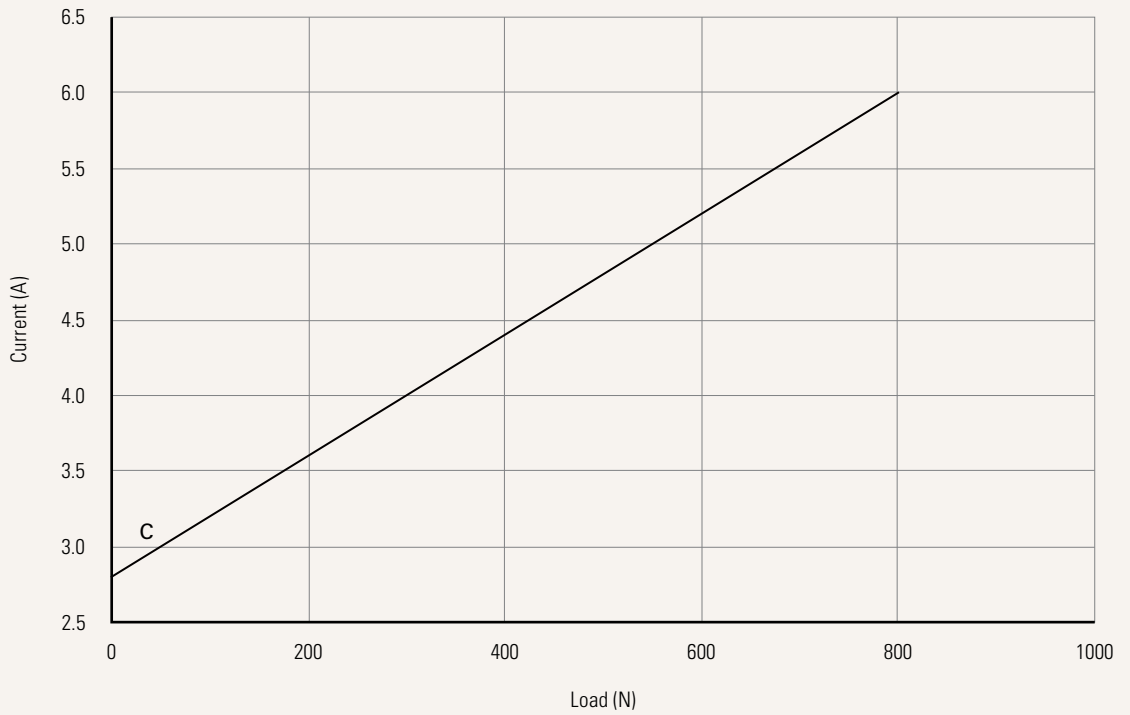

**Note**

1 The performance data in the curve charts shows theoretical value.

<b>Voltage</b>	2 = 24V	
<b>Load and Speed</b>	<a href="#">See page 2</a>	
<b>Stroke &amp; Retracted Length (mm)</b>	<a href="#">See page 5</a>	
<b>Color</b>	1 = Black (RAL 9005), black wiper 2 = Grey (RAL 9006), black wiper 3 = White (RAL 9016), black wiper 4 = Special grey (RAL 9022), black wiper	6 = Grey (RAL 9006), grey wiper 7 = White (RAL 9016), white wiper 8 = Special grey (RAL 9022), grey wiper
<b>Motor Housing Step</b>	0 = With	1 = Without
<b>Output Signals</b>	2 = Two Hall sensors	
<b>Connector</b> <a href="#">See page 5</a>	1 = DIN 6P, 90° plug	E = MOLEX 8P, plug, standard
<b>Cable Length (mm)</b>	1 = Straight, 500	4 = Straight, 1500
<b>Welding Part</b> <a href="#">See page 5</a>	0 = Without L = Left	R = Right

### Note

<sup>1</sup> The TL is designed especially for push applications, not suitable for pull applications.

## Stroke & Retracted Length (mm)

Foot Assembly	Stroke/Retracted Length	
	Standard	M
Standard	650/590	660/560
With Shoes	650/610	660/580


### Note

1 Only specific TEKs can be used with the shoes, please refer to the TEK spec code.

Standard




With shoes

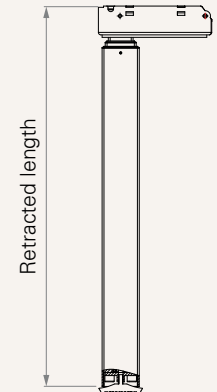


## Connector

1 = DIN 6P, 90° plug




E = MOLEX 8P, plug, standard



## Welding Part

Direction

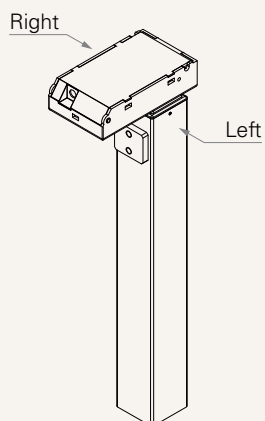

## Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.